
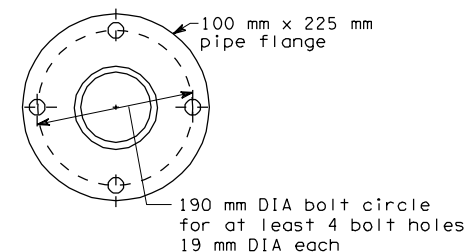


PAD MOUNT

NOTES

1. Where pad or pedestal mounts are located in a sidewalk, construct mount top flush with sidewalk grade, omitting chamfer where top and sidewalk abut.
2. Pad mount design is typical.
3. Place a silicone seal between the cabinet foundation and the cabinet for the pad mount design.

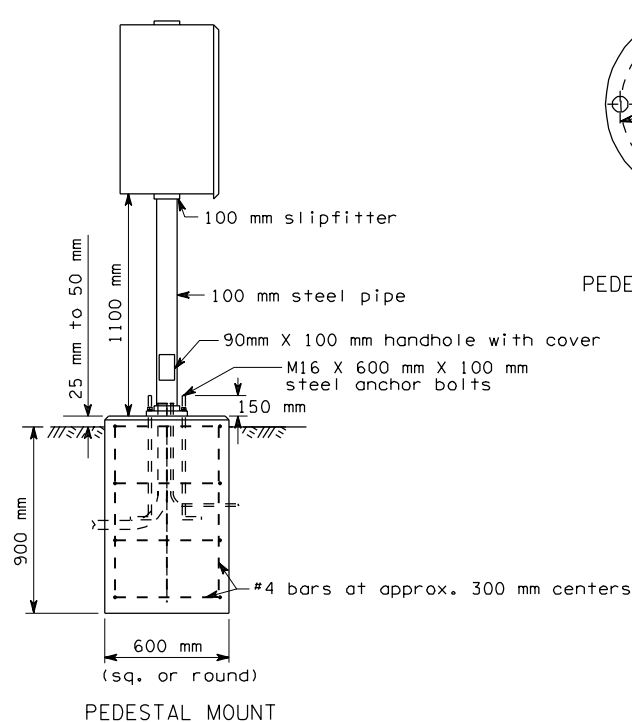

PEDESTAL BASE DETAILS

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

CABINET FOUNDATION DETAILS

STANDARD PLAN J-6c

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE _____

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON